
### Ku-Band East Africa (EA) G/T

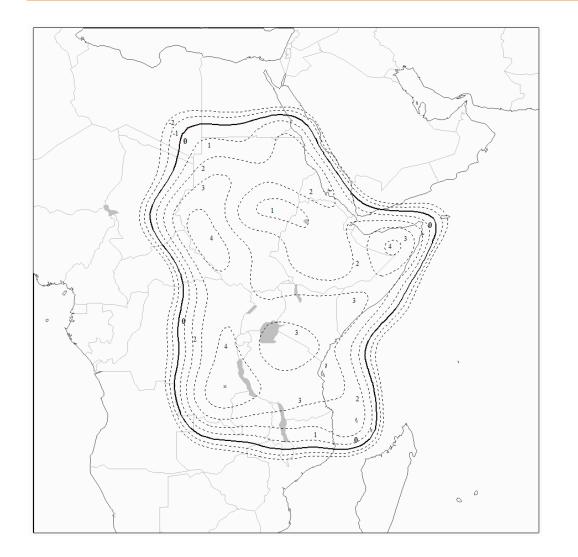

Contours Shown			
G/T [dB/K]	Max. SFD [dBW/m²]		
4.7 Beam peak			
4	-98	-83	
3	-97	-82	
2	-96	-81	
1	-95	-80	
0	-94	-79	
-1	-93	-78	
-2	-92	-77	


#### Notes

The adjacent plot shows the measured performance of a typical satellite transponder. Small performance differences should be expected between individual transponders.

The bold contour line represents the nominal edge of coverage. For operation beyond this contour, co-channel interference levels should be assessed on a case by case basis.

# SES NEW SKIES

## **Ku-Band East Africa (EA) EIRP**

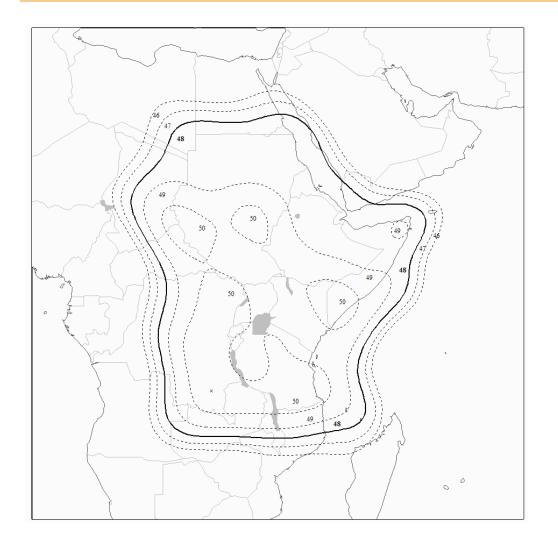

Contours Shown
EIRP [dBW]
50.5 Beam peak
50
49
48
47
46

#### Notes

The adjacent plot shows the measured performance of a typical satellite transponder. Small performance differences should be expected between individual transponders.

The bold contour line represents the nominal edge of coverage. For operation beyond this contour, co-channel interference levels should be assessed on a case by case basis.

NSS-12 TUG, March 2008 Version 1.0 © 2008 SES NEW SKIES All Rights Reserved

# SES NEW SKIES